REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	Removed pedestals		
2	Pocket hole was 1.55+1.00/-0.05	3/4/94	T.S.
3	Drawing format change	6/25/03	BVB

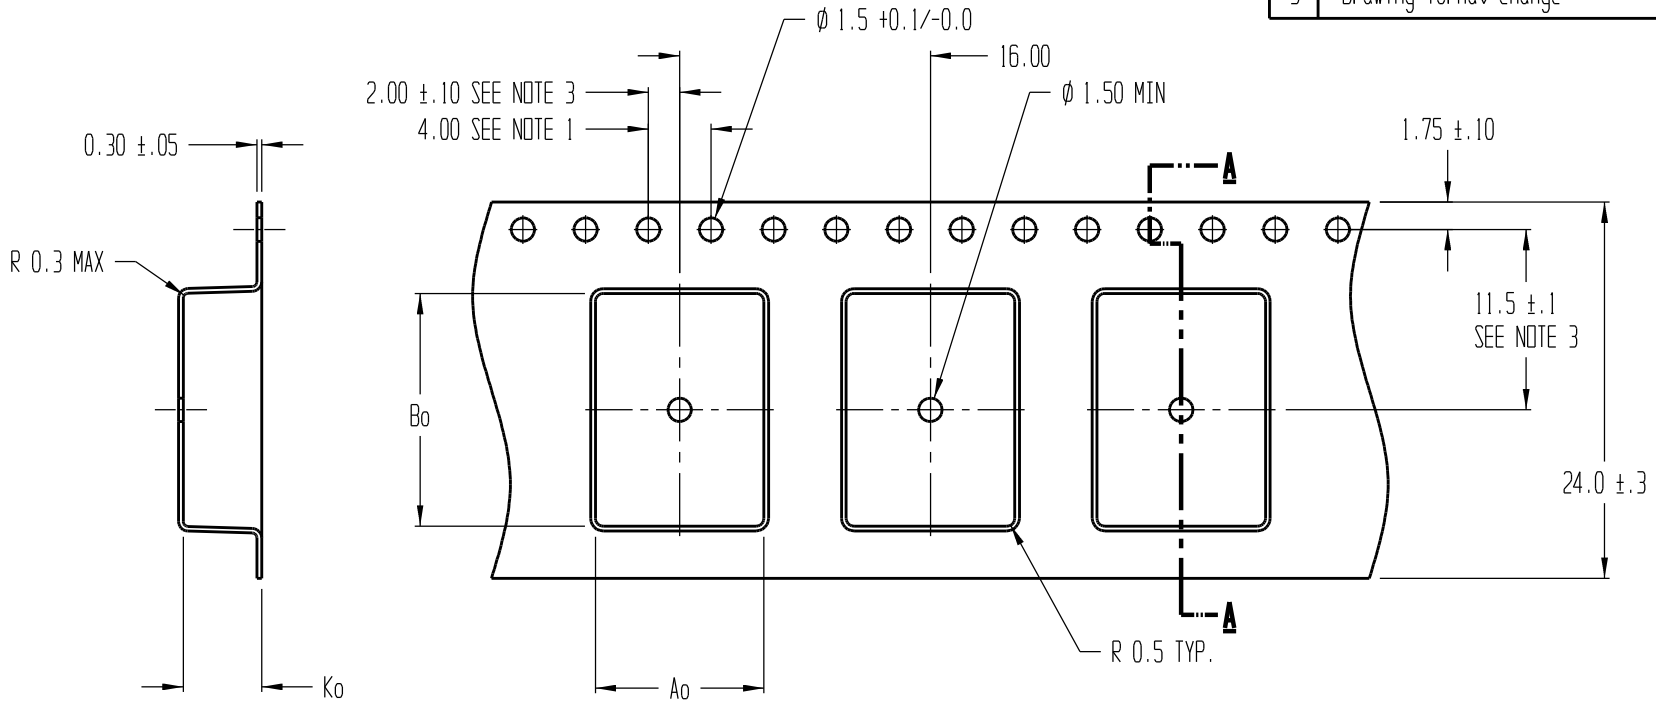

SECTION A - A

Ao = 10.75
Bo = 14.85
Ko = 5.00

NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

ADVANTEK

TITLE	ADVANTEK PART DRAWING NUMBER TO-263-A CARRIER TAPE		
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10	MATERIAL PS+C		
	ALL DIMENSIONS IN MILLIMETERS	DWG SIZE B	
DRAWN BY RJB/BVB	DATE 10/8/93	SCALE 3:1	SHEET 1 OF 1
REFERENCE NO.	DWG NO. A0106-94-1		REV 3