

Destacker - Knife

Using “Knife Cylinder”, this unit unstacks bare boards one by one



STANDARD





- Touch screen (Operating panel)
- Tower lamp
- Manual width adjustment
- Double plate structure
- SMEMA interface
- Controlled by PLC
- 30pcs stacking available with 1kg

OPTIONS

- Digital speed controller (0~200mm/sec)
- Auto width adjustment
- Double sensors
- ESD powder coating

GENERAL SPECIFICATION

Transport height	950mm±20mm
Color	H-GY2912-T3_Samhwa Paints
Flow direction	Left to Right / Right to Left
Fixed rail	Front / Rear
PCB edge	3mm
PCB thickness	1.0mm ~ 2.0mm
Conveyor speed	200mm/sec
Conveyor belt	1.0T, Antistatic 10 ⁸⁻¹⁰ Tem: 100 °
Air supply	0.5Mpa(5bar)
Air usage	10.0 l/min
Electricity consumption	20W
Power	230V/50Hz, 60Hz 1Phase

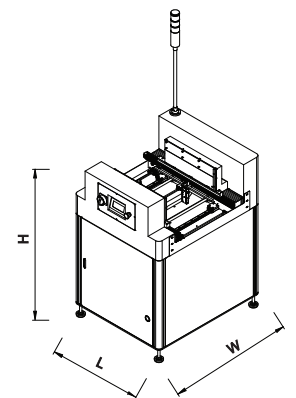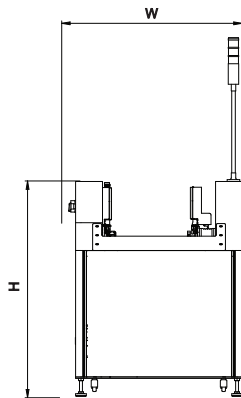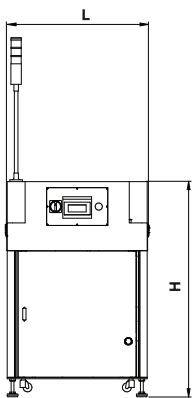

MODEL	SIZE	Max PCB(L X W)	Min PCB(L X W)	DIMENSION (L X W X H)	WEIGHT (Kg)
YDL-0M 00	M	330 X 250	70 X 50	600 X 680 X 1200	180
YDL-0X 00	XL	460 X 460		800 X 930 X 1200	190

*Customizable