


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
3	TAPE WIDTH WAS 16.0±.3	4/20/11	BTH

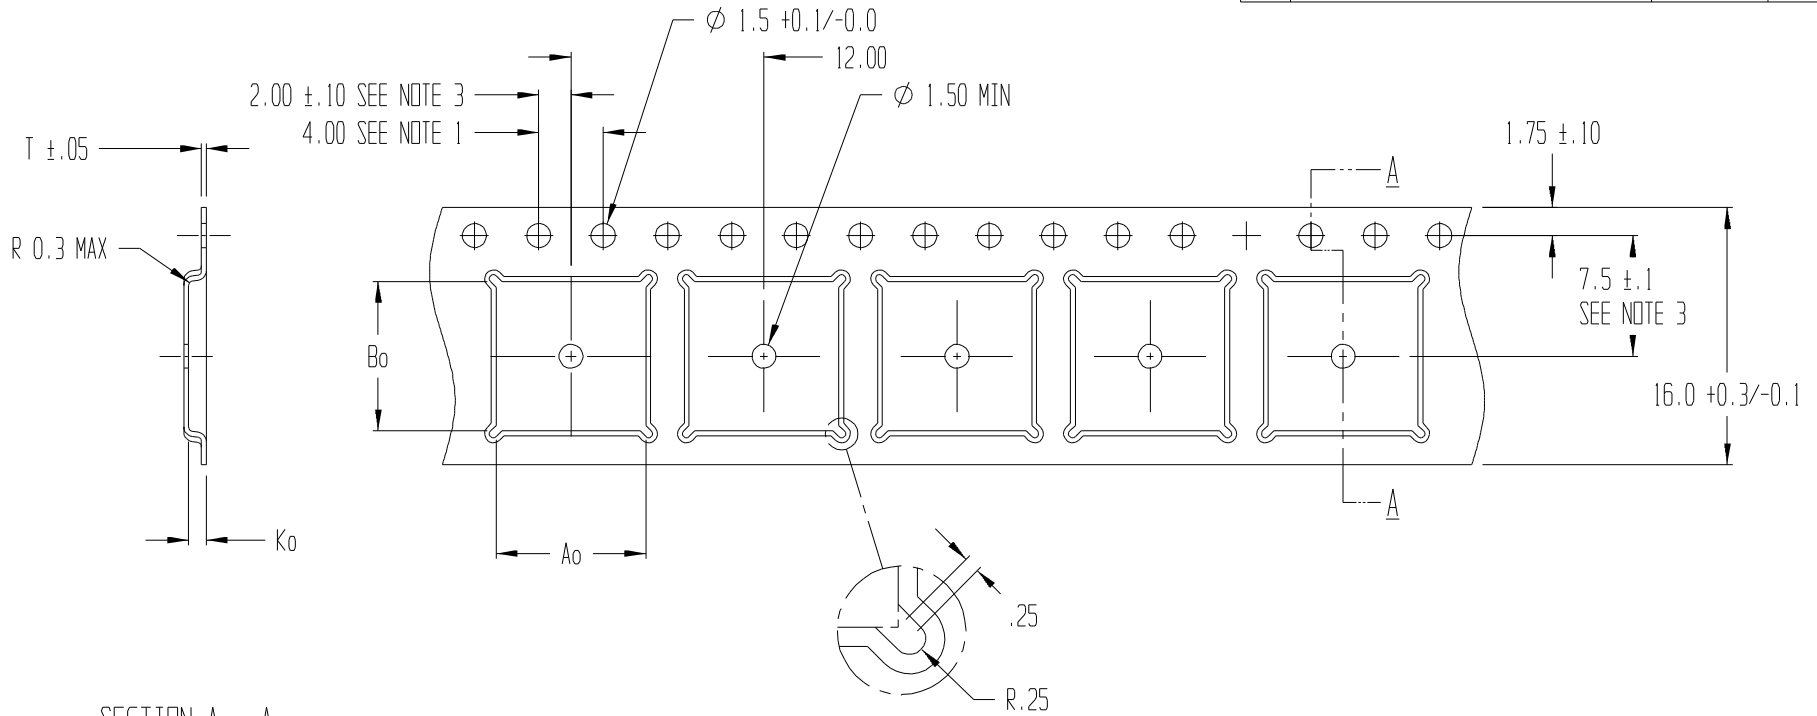

SECTION A - A

$A_0 = 9.30$   
 $B_0 = 9.30$   
 $K_0 = 1.10$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3.  $A_0$  AND  $B_0$  ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

PART#	T	MATERIAL	DRAWING NO.
ML0909-BC	0.30	PS+C	T102535AT
ML0909-BD	0.30	PS+C	T102535AT



TITLE ADVANTEK PART DRAWING NUMBER ML0909-B CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY TMD/BTH	DATE 10/08/99	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-9208-A	DWG NO. T102535AT	REV 3