

## AQUBE® LH5

Fully automatic state of the art PowerSpray® fine cleaning system for assembled PCBs

Cleans PCBs, hybrids and misprints from flux residues, resin, copper, oxide and soldering support substances

Capacity: up to 176 equals 2.8m<sup>2</sup> (30 ft<sup>2</sup>) eurocards in up to two variable drawer baskets

Part number: 0900AQ5LH21

## CLEANING TECHNOLOGY

Made in Germany




### Certifications:


This system in its basic version was certified for its energy and water saving processing, for easy operability and for the standard integration of comprehensive safety features.

- \* Two tank system with triple circuit function
- \* Smart Factory ready: DNAccess, remote control, traceability (PLC data scanning and memorizing)
- \* Fully automatic 4step process: cleaning, rinsing (tap water), DI-water rinsing, VMH®-TurboDigital hot air evaporative drying
- \* Horizontal PTFE mounted rotor system with up to four asynchronous spray rotors for thorough wetting (no blind spots)
- \* Heater cleaning tank A, automatic water change for the rinsing circuit, DI water system, mixing-blending unit, water measuring unit (ion contamination measurement), ion exchanger and fine filter system as standard
- \* Processes and service intervals PLC controlled.
- \* Event issuing and software control via touch screen
- \* EDGELESS Design and VARAccess® service access: maximum capacity, easy maintenance on a very small footprint
- \* Suitable for high temperature cleaning and rinsing up to 80 °C (176 °F)


## Key applications

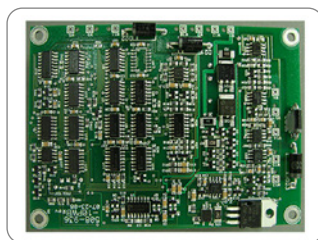


Assembled PCBs

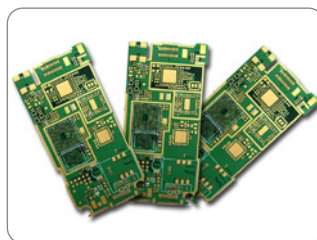

Hybrids (HDI)

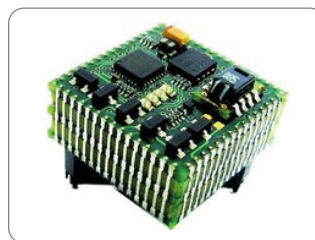

Hybrids (SiPs)

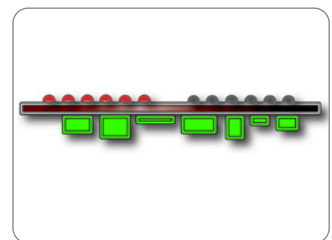


Misprints

The new kolb AQUBE® series offer next-generation cleaning systems - even more efficient, even more compact, easy to handle and maintain, pre-equipped for extended water management and cyber-physically ready for the smart factory (SF ready).

AQUBE® LH5 is a completely German engineered and manufactured fully automatic standard PCB fine-cleaning system with a capacity of up to 176 (30 ft<sup>2</sup>) eurocards per cleaning cycle.

The configuration with two tanks and triple circuit function ensures short cycle times and makes this system the perfect economic choice for the cleaning of assembled PCBs. With up to 80 °C (176 °F) cleaning and 120 °C (248 °F) drying temperature also ideally suited for parts cleaning of medical equipment and use in the production of medical electronics.

**The cleaning system can be operated with all common electronics cleaning supplies (detergents / chemistry, etc.) which are approved by the manufacturer.**








## AQUBE® LH5

Fully automatic standard PowerSpray® fine cleaning system for of assembled PCBs

Part number: 0900AQ5LH21



### Application overview

				
<b>Most suitable</b>	<b>Optional suitable</b>	<b>Optional suitable</b>	<b>Optional suitable</b>	<b>Not suitable</b>
Assembled PCBs Hybrids Misprints	Stencils Screens, PumpPrints Misprints	Solder frames Solder carriers Solder masks	ESD Boxes Containers Magazines	Condensation traps Filters Steel sheets

Optional suitable applications can also be optimally realized with the appropriate options.

**Cleaning** (key process 1): From the cleaning tank A (TA) the cleaner liquid is sucked by a magnetically coupled pump unit and routed with a controllable volume flow through a separate circuit into the PTFE mounted ASYNCHRO® stainless steel spray rotors with patented PUSHFORCE® nozzles. Their geometry ensures a comprehensive and thorough cleaning, even in inaccessible and critical areas. After the washing procedure, the valve switchover of the process chamber undocks the cleaning circuit until the next process run.

**MediumWipe®** (optional intermediate process): The remaining cleaner is blown off from the clean products and blown out of the cleaner circuit and recirculated into the cleaning tank before the valve switchover closes.

**Rinsing with tap water** (key process 2): From the rinsing tank B/C (TB/C), the water is pumped through the separate second circuit into the spray rotors. Tap water has (compared to DI / DM water) the advantage of lower surface tension and thus flushes also critical points as low standoffs more efficient.

**MediumWipe®** (optional intermediate process): The remaining water is blown off from the products and blown out of the cleaner circuit and recirculated into the rinsing tank (TB/C).

**Clear rinsing with DI / DM water** (key process 3): The DI / DM water is produced from tap water in an integrated MB-cartridge and flushes conducting ions of the previous processes. This process is repeated automatically until the remaining amount of ions falls below the programmed value.

**MediumWipe®** (optional intermediate process): Blowing off and recirculating the remaining DI / DM water into the rinsing tank (TB/C).

**Drying** (key process 4): The clean products are dried with the patented VMH® (Venturi Mixed Hot air) technology. A high volume flow of normal circulating air is blown into a venturi nozzle. The resulting differential pressure there (passively) sucks on a small amount of very high temperature air. The resulting air mixture provides for uniformly high drying temperature, adjustable between 45 and 120 °C (113 - 248 °F), all over the process chamber. Further advantages are robustness and low cost of ownership. Energy is only needed for a fan and the heating of a very small amount of air; the rest is executed by pressure differences and air duct geometry.

**Maintenance:** The system has a VARlccess® maintenance access system with recessed, variable doors and removable panels. In the maintenance area among others are the pump-out set, the re-dosage unit with space for a 25 liter detergent container and an optional re-dosing unit for a 5 l additive container as well as the MB cartridge for DI / DM water processing. Tank levels as well as pressure values and maintenance cycles are monitored by the PLC and displayed on the touch screen.



## AQUBE® LH5

Fully automatic standard PowerSpray® fine cleaning system  
for of assembled PCBs

Part number: 0900AQ5LH21



### Main standard features

- ☐ PowerSpray® technology bundle: magnetically coupled S-Power (Standard) pump units (tank A, tank B), lower VA drawer basket, twofold ASYNCHRO® volume-spray rotorsystem with low maintenance PTFE mounted stainless steel rotors and PUSHFORCE® special nozzles, "Option100" software program (100 freely selectable process programs)
- PolyPower® configuration with Power pump unit
- EATON Programmable Logic Controller (PLC) with module extension for special programming and technology extensions
- Smart Factory ready: DNAccess® (standard) for remote control (see options) and traceability with retractable touch monitor and integrated industry PC (see options)
- High resolution 10" (1,024 x 600 px) display with capacitive multi-touch and intuitive process view
- Fourfold alternating LED status light bar integrated in the system frame
- ☐ Function package PCBA Cleaning (incl. option automatic water change for rinsing circuit / tank B/C with lifting unit, option heater cleaning tank (TA), function package DI water system (incl. DI / DM water measuring unit (residual ion contamination measurement), mixing-blending unit, ion exchanger cartridge, cartridge deaerator)
- ☐ Full flow coarse filter (process chamber)
- ☐ ClosedLoop reprocessing of cleaning and rinsing fluids
- ☐ Automatic re-dosage unit for 25 l detergent container
- VMH® TurboDigital hot air evaporative drying (control range approx. 45 - 120 °C / 113 - 248 °F)
- ☐ ESD grounding point for the operating personnel
- ☐ Exhaust air and vapor extraction unit
- HMA software and pre-equipping for HMA hardware (Heavy Metal Adsorber) for the cleaning circuit (see options)
- ☐ Safety features: safety interlock on the process chamber door, overflow alarm for all tank sections, overheating protection for all heating and drying elements, end switches for all motor-driven valves and drives, personnel protection insulation
- VARlccess® service access with right and left-hinged side doors as well as unhinging possibility for side doors, front panel, and rear supply rail
- EDGELESS housing design. Doors, cover panels and hinges without edges, depot for traceability scanner and monitor in the right side panel
- ☐ Process sections made of electrolysis resistant elements

■ = AQUBE®-exclusive components (vs. kolb PSE Economy series)



## AQUBE® LH5

Fully automatic standard PowerSpray® fine cleaning system  
for of assembled PCBs

Part number: 0900AQ5LH21



### Main options

- Function package High-Temperature Application (incl. process chamber heat insulation and VapourStop temperature stabilization)
- Function package Fine Filter System Tank A (incl. upgrade to XL-Power pump unit for the cleaning circuit, fine filter system and sediment filter for the cleaning tank A (TA))
- Function package AOSelection® - for separate discharge of rinsing water rinsing water that must be disposed (incl. automatic wastewater changer for rinsing tank B (TB), 1000 liter IBC empty container, overflow protection for empty container).
- Function package Online Cleaner Regulation (incl. brix monitor for refraction measurement, automatic re-dosing of the cleaner, flow meter, dosing ball valve)
- Function package WPSD IU Wastewater Treatment Unit (incl. WPSD IU5/7 SYMBIO® module, pH-lowering unit with pH measuring probe, pH re-dosing, control valves, two heavy metal adsorber cartridges, two cartridge deaerators)
- Function package Traceability "Basic" (incl. SPC data scanner, data backup in CSV file, backup via SD card (via slot in the PLC))
- Function package Traceability "Comfort" (incl. PLC data scanner and retractable touch monitor and industrial PC with Intel processor)
- Function package QuickChange (incl. SlideIn quick-loading feeder unit, upper wash basket with PTFE-mounted ASYNCHRO® TopDown stainless steel double rotors with PUSHFORCE® special nozzles and SpeedLoad cart to accommodate of two feeder units)
- Automatic re-dosage unit for 5 l additive container
- Decalcification unit for reducing the lime content in the rinsing water (tap water) circuit / rinsing tank B (TB)
- HMA- (Schwermetalladsorber) Einheit für den Reinigungskreislauf
- Air filter unit for filtering the drying air according to filter class F7
- MediumWipe® unit for further optimization of detergent and rinsing fluid use
- Upper VA drawer basket with PTFE mounted ASYNCHRO® stainless steel TopDown-double rotors with PUSHFORCE® special nozzles
- Permanent automatic rotor run control
- QuickConnect rotor quick-clamping system for fast insertion or removal of the rotors
- Remote Control (remote monitoring, mailing, etc.)
- RMA Remote Maintenance Assistance (factory controlled maintenance support)
- Paint of choice (frame rack, covering and hood)
- XL-Power pump unit for cleaning circuit / cleaning tank A (TA)

■ = AQUBE®-exclusive components (vs. kolb PSE Economy series)



## AQUBE® LH5


Fully automatic standard PowerSpray® fine cleaning system for of assembled PCBs

Part number: 0900AQ5LH21



### Internal rinse water processing (standard)

### Options\* for water management

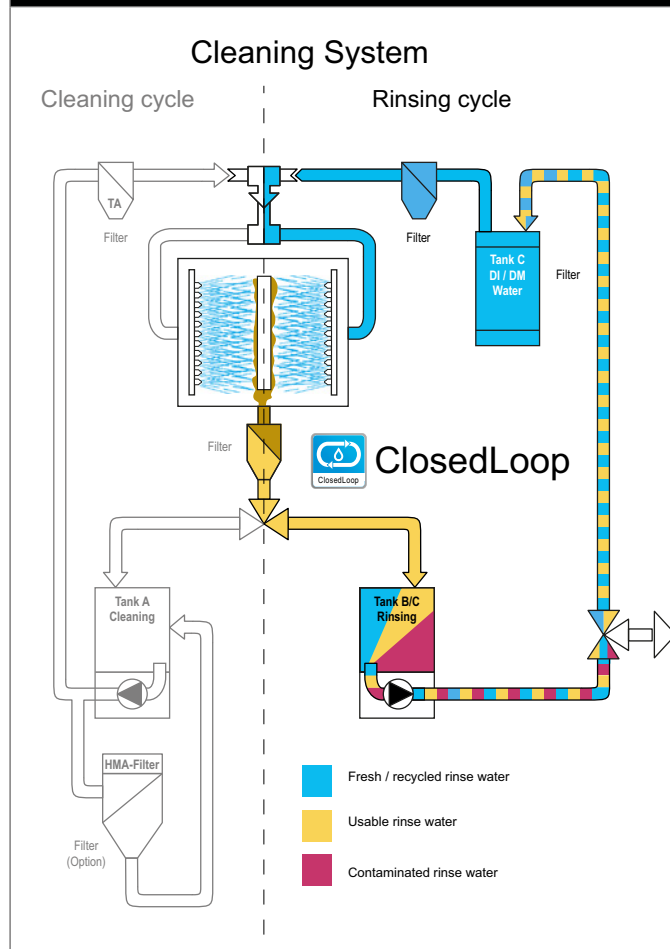

#### ■ AOSelection® unit


separates mandatory disposable sewage water from rinse water which can be discharged into a public sewage network.

#### ■ WPSD IU SYMBIO-module

Processes mandatory disposable sewage water to be discharged into a public sewage network.

\* Operating companies of industrial cleaning systems are responsible for proper disposal of wastewater / rinse water and (wasted) cleaning detergent. Further information on wastewater management at [www.kolb-ct.com/systems/water-management/](http://www.kolb-ct.com/systems/water-management/), consulting requests to [info@kolb-ct.com](mailto:info@kolb-ct.com)

■ = AQUBE®-exclusive components (vs. kolb PSE Economy series)



## AQUBE® LH5

Fully automatic standard PowerSpray® fine cleaning system for of assembled PCBs

Part number: 0900AQ5LH21



### Technical data

Technology base	<b>kolb PowerSpray®</b>
Capacity	176 (2.8 m² / 30 ft²) eurocards
Process chamber dimensions	W 540 ▪ D 590 ▪ H 570 mm (W 21.25" ▪ D 23.22" ▪ H 22.44")
Usable space lower drawer basket only	W 450 ▪ D 475 ▪ H 520 mm (W 17.72" ▪ D 18.7" ▪ H 20.47")
Usable space utilizing upper and lower drawer	W 450 ▪ D 475 ▪ H 225 mm (W 17.72" ▪ D 18.7" ▪ H 8.86") - two times
Volume tank A (cleaning),	55 l
Volume tank B / C (rinsing)	35 l
Power supply	400 V AC, 16 A, CEE plug / 3 Ph / 50 or 60 HZ
Power consumption	4 kW
Control system	PLC (EATON)
Temperature load	up to 80 °C (176 °F)
Control range drying	approx. 45 - 120 °C (113 - 248 °F)
Filter system	up to four stages - 1. Full flow coarse filter < 2mm (0.08"), 2. Sediment filter inside the tank, 3. 20" fine filter (1 - 100 µm - process dependent), 4. HMA filter
Supply connection 1 (tap water)	connection for 1/2" hose, with 30µm water filter (prov. by customer: inlet water quality < 350 µS conductance value (< 10° dH) or option descaling unit)
Supply connection 2 (DI / DM water)	connection for 1/2" hose (DI-net prov. by customer or bridging to tap water)
Supply connection 3 (compressed air)	6 - 8 bar (87 - 116 psi) - 100 l / min for options HT-version or MediumWipe®, connection for 8 mm (0.31") compressed air hose
Rinse water drain connection	(with integrated pump out system ) connection for 1" hose
Exhaust connection	Ø 160 mm (6.3"), exhaust capacity 200 - 300 m³ / h (7063 - 10,595 ft³ / h)
Operating condition room temperature	approx. 20 - 35 °C (68 - 95 °F)
Operating noise / Footprint / Empty weight	63 dB (A) / 840 x 1,180 mm (33.07" x 46.46") / 350 kg (772 lbs)

