


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
4	WAS CUSTOM TOOL	1/27/11	TMD

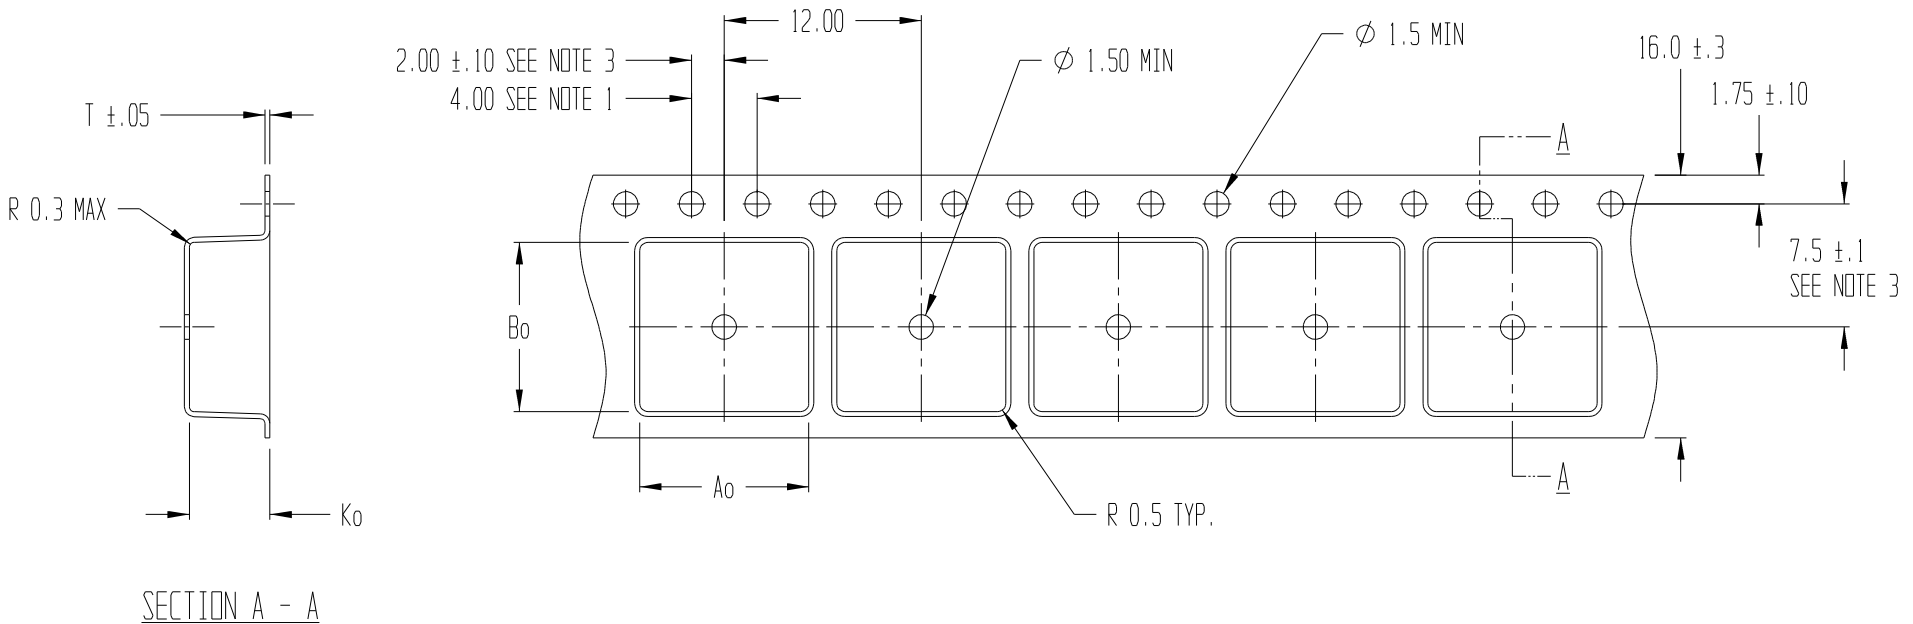

$A_o = 10.30$
 $B_o = 10.30$
 $K_o = 4.90$

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. A_o AND B_o ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

PART #	T	MATERIAL	DWG NO
PLCC20-AC	.30	PS+C	A0103-89-1
PLCC20-AX	.35	PS+C	T108735BT



TITLE ADVANTEK PART DRAWING NUMBER PLCC20-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL SEE TABLE	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY CKS	DATE 12/13/91	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 7417.00	DWG NO. SEE TABLE	REV 4